

Mini-Fit® TPA 2 Power Connectors


molex®

Mini-Fit® TPA 2 Power Connectors ensure proper mating and prevent accidental terminal back-out while delivering 9.0A current rating in a connector that's compatible with standard Mini-Fit Jr. Headers

Features and Benefits

Terminal position assurance (TPA) feature with secondary locking feature

Reduces assembly error and ensures terminals are fully seated and will not back out

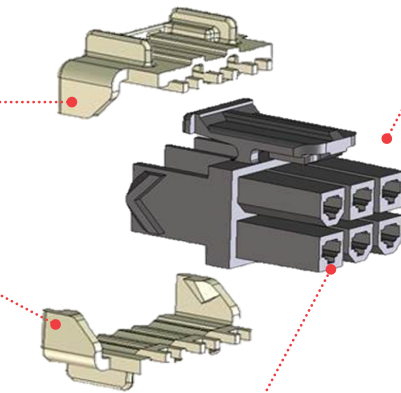


Fully isolated header pins and plug and receptacle terminals

Protects contacts against potential damage during handling and mating


Positive-lock receptacle

Ensures mated connector assemblies will not accidentally disengage. Provides audible click while mating

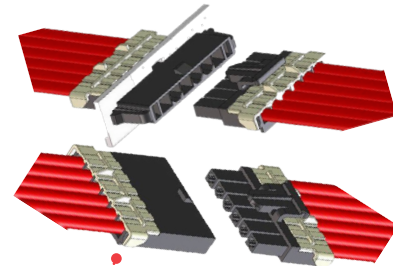

Compatible with existing Mini-Fit Jr.™ Headers and Plugs

Enables running-change implementation to incorporate the TPA 2.0 design. Removes the need to change both sides of the interface or to make significant revisions or investments in applications

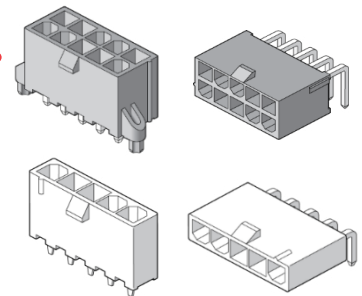

Applications

Consumer/Home Appliances

Data/Communications

Office equipment

Automotive

Harness manufacturers

Non-sealed applications

Inside devices

Industrial Automation

Equipment


Networks



Industrial Automation: Equipment



Industrial Automation: Networks



Mini-Fit Jr.™ TPA 2.0 Receptacle

Specifications

REFERENCE INFORMATION

Packaging: See Product Specs
UL File No.: E29179
CSA File No.: LR19980
Mates With: All Mini-Fit
Terminal Used: 172718 and 172765 Series
Designed In: (Millimeters or Inches)
RoHS: Yes
Halogen-Free: Low
V-O: Yes
Glow-Wire Compliant: Available Option in 2017

ELECTRICAL

Voltage (max.): 600V AC/DC
Current (max.): 9.0A
Contact Resistance: 10 Milliohm
Change from initial
Dielectric Withstanding Voltage: 2200V
Insulation Resistance: 1000 Megohms (MIN)

MECHANICAL

Contact Insertion Force: 15N (3.4 lbf)
Contact Retention to Housing: 30N (6.74 lbf)
Mating Force: 14.7N (3.3lbf)
Unmating Force: 1.0N (0.22 lbf)
Thumb Latch Yield Strength (min.): 60N (13.5 lbf) (V-0)

PHYSICAL

Pitch: 4.20mm
Wire Gauge: 16 to 24 AWG
Flammability: UL 94V-0 and Glow Wire
Housing: Nylon
Contact: Brass or Phosphor Bronze
Plating: Tin
Operating Temperature: -40 to +105°C

Ordering Information

Series No.	Component	No. of Rows
172708	Receptacle	Dual
172709	TPA	Single and Dual
200453	Receptacle	Single
200471	Plug	Single
172762	Free-Hanging Plug	Dual
172767	Panel-Mount Plug	Dual
200488	Panel-Mount Plug	Single
45135	TPA Cable Assembly	Single and Dual