


FCT > D-SUB PRODUCTS

*Standard, High-Density and Mixed Layout D-Subs
D-Sub Hoods and Cable Assemblies*

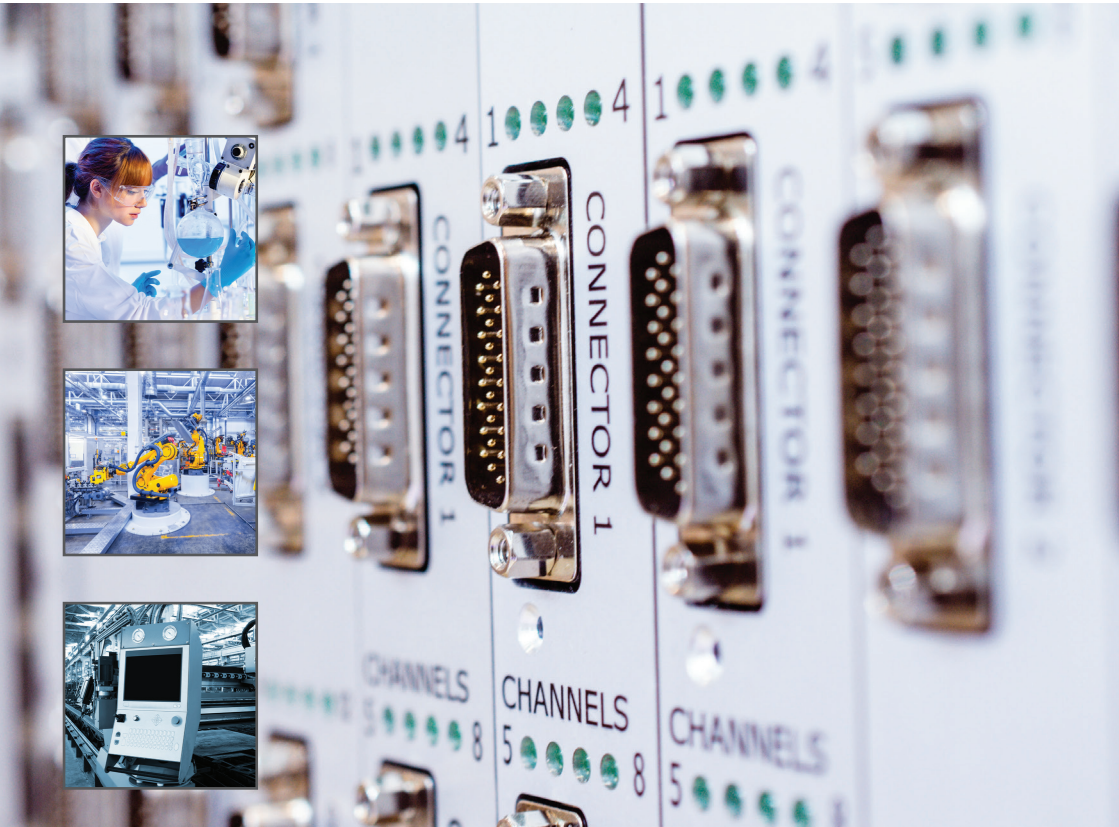

HEILIND
Performance. Trust. Innovation.

molex



FCT D-Sub Connectors are a popular solution found in a broad range of applications and various industries. It is a time tested connector commonly used for signal transmission, communications, power distribution, control panels, and test equipment.


FCT D-Sub products machined contacts providing higher current, lower resistance, and greater durability compared to stamped contacts. They provide a secure and reliable, semi-permanent electrical path between two devices. Each series offers five different shell sizes. Additionally, available mating combinations include wire-to-wire, wire-to-board and board-to-board interconnects.

FCT D-Sub products are readily available in a wide variety of materials and plating combinations. Specialty D-Sub connectors include waterproof IP67, filtered, non-magnetic, and non-outgassing. If a new configuration is required Molex can conveniently provide a tailored solution.

To accompany the connectors there is also a full range of hoods. The hoods provide strain-relief, connector protection, and cable dressing- completing the cable assembly. Full turnkey cable assemblies are also available.



Applications



Power and Signal



Communications




Aircraft Cabins

Standard D-Sub

Circuit sizes: 9, 15, 25, 37, 50

Machined pin and socket contacts available as solder pot, crimp, straight or right-angled PCB termination



High-Density D-Sub

Circuit sizes: 15, 26, 44, 62, 78

Machined pin and socket contacts available as solder pot, crimp, straight or right-angled PCB termination




Mixed Layout D-Sub

Combining signal and special contacts in a single connector

Special contacts: power, coaxial, high-voltage, pneumatic

Many configuration layouts available



Hoods, Metal and Plastic

Wide range of hoods in five shell sizes

Various designs and materials

Simple assembly, no special tools



High Power Contacts

Size 8

Current Ratings: 10A, 20A, 30A and 40A

Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle

Press-fit available



Coaxial Contacts

Size 8

Impedance: 50 Ohm and 75 Ohm available


Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle

3 and 5-pin footprint options

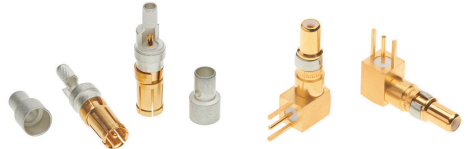

High-Voltage Contacts

Size 8

Voltage: 3000V maximum

Gold plating options available

Cable assembly options: Crimp and solder versions

Board-level options: Straight



Pneumatic Contacts

Size 8

Suitable for compressed air line tubes

Pressure: 101.5 PSI maximum

Cable assembly options: Straight or right-angle



Standard Contacts

Size 20

Current Rating: 7.5A

Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle



High-Density Contacts

Size 22

Current Rating: 5A

Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions available

Board-level options: Straight or right-angle





Waterproof D-Subs and Hoods

Standard, high-density and mixed layout D-Subs
Waterproof hoods and protective caps
IP67 rated



Non-Magnetic D-Subs and Hoods

Connectors, contacts, hoods
Permeability $\mu r \leq 1.0025$
100% permeability tested




Filtered D-Subs

Standard, high-density and mixed layout D-Subs
High-pass and low-pass filters



Dual Port D-Subs

Space saving, compact connector
Standard, high-density and mixed layout D-Subs



Cable Assemblies

Data and signal cable assemblies
Power cable assemblies
Specialized hybrid cable assemblies
Fully shielded cable assemblies
Overmolded cable assemblies
IP67 rated cable assemblies



Applications



Test and Measurement



Medical Equipment



Security

HEILIND
Performance, Trust, Innovation.

Heilind Electronics GmbH
Pfarrer-Huber-Ring 8
D-83620 Feldkirchen-Westerham
Telefon: +49 8063 8101 300
Fax: +49 8063 8101 222
E-Mail: vertrieb@heilind.com